


Silencer

Ordering Information


- When ordering, specify material, gauge (if non-standard), dimension and end style.
- Reduces sound levels from fans and equipment. Due to varying applications, no decibel testing has been performed on this product.
- Air flow directional arrow sticker is attached to product.



| Ø in. | B OD in. | C Length in. | D (QF) in. | D (AFL/ FFL) in. | Std Weight Lbs |
|-------|----------|--------------|------------|------------------|----------------|
| 3 | 11 | 28 | 3.5 | | 10 |
| 4 | 12 | 28 | | | 21 |
| 5 | 13 | 28 | | | 35 |
| 6 | 14 | 30 | | | 43 |
| 7 | 15 | 30 | | | 54 |
| 8 | 16 | 35 | | | 65 |
| 9 | 17 | 40 | | | 76 |
| 10 | 18 | 48 | | | 89 |
| 11 | 19 | 54 | | | 96 |
| 12 | 20 | 54 | | | 104 |
| 13 | 21 | 60 | | | 113 |
| 14 | 22 | 60 | 122 | | |
| 15 | 23 | 64 | 2 | | 149 |
| 16 | 24 | | | | 176 |
| 17 | 25 | | | | 201 |
| 18 | 26 | | | | 225 |
| 19 | 27 | | | | 245 |
| 20 | 28 | | | | 265 |
| 21 | 29 | | | | 288 |
| 22 | 30 | | | | 310 |
| 23 | 31 | | | | 358 |
| 24 | 32 | | | | 406 |
| 26 | 34 | | | | 68 |
| 28 | 36 | 600 | | | |
| 30 | 38 | 678 | | | |
| 32 | 40 | 700 | | | |
| 34 | 42 | 770 | | | |
| 36 | 44 | 897 | | | |
| 38 | 46 | 974 | | | |
| 40 | 48 | 1118 | | | |

QF Material Options

| | Galv | | | SS | | |
|----------|--------|-----------|--------|--------|-----------|--------|
| | Gauges | Size (in) | | Gauges | Size (in) | |
| | | Min. Ø | Max. Ø | | Min. Ø | Max. Ø |
| Standard | 20 | 3 | 16 | 20 | 3 | 16 |
| | 16 | 17 | 40 | 16 | 17 | 40 |

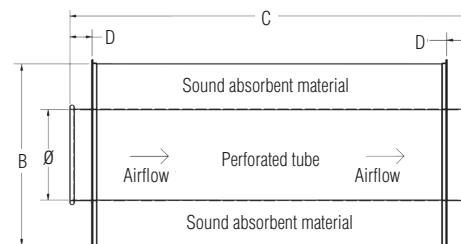

Flanged Material Options

| | Galv | | | SS | | |
|----------|--------|-----------|--------|--------|-----------|--------|
| | Gauges | Size (in) | | Gauges | Size (in) | |
| | | Min. Ø | Max. Ø | | Min. Ø | Max. Ø |
| Standard | 20 | 3 | 16 | 20 | 3 | 16 |
| | 16 | 17 | 40 | 16 | 17 | 40 |

Construction

Collars: Caulked and painted.

Outer Tube: On 16" diameter pipe and all smaller sizes, longitudinal seam is laser welded. On 17" and greater, seam is plasma welded.

Optional End Styles: Standard QF end can be changed to Raw ID (RI), Raw OD (RO), No Fitting (NF), Hose Adapter (RF), Flat Flange (FFL), Angle Flange (AFL), or Van Stone (VS).