


Nordfab In-line Spark Trap

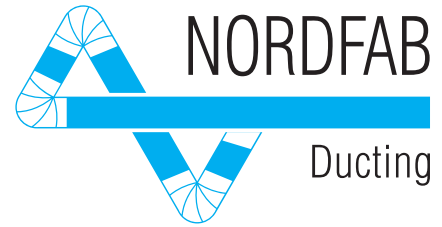

Complementary Fire Prevention for your Dust Collection System

Simple, Economical Fire Protection


Installed in ducting as part of a dust collection system, the Nordfab In-line Spark Trap greatly reduces the possibility of fire in cyclones / collectors by decreasing the number of sparks which could reach the cyclone or collector through the ductwork.

The spark trap's effectiveness is based on a simple principle — disrupting the laminar airflow to cause sparks to cool and extinguish before they can enter a cyclone / collector. There are no moving parts and no power is required for operation. Pressure loss is minimal.*

Quick, Easy Installation and Cleanout

Quick-Fit clamp-together ducting eliminates rivets, screws, and welding, significantly reducing the time required to install or replace ducting. The Nordfab In-line Spark Trap can quickly and easily be mounted into Quick-Fit ducting systems, or other duct systems via flanged ends or with use of a Nordfab adapter, and The trap can easily be removed for cleanout. Calibration or other assistance from a factory technician is not required.

*The unit does not create a secondary dust collection point.



Nordfab In-line Spark Trap (shown with viewing spools on either side)



The Nordfab In-line Spark Trap is available with Quick-Fit ends or flanged ends.

NOTE: The Nordfab In-line Spark Trap is not a replacement for spark detection or explosion isolation systems. Complementary device only.


Contact Nordfab to find your local ducting expert:
800-532-0830 | 336-821-0801

www.nordfab.com

Nordfab's In-line Spark Trap must be mounted in a horizontal position.

The world's fastest ducting™

Nordfab In-line Spark Trap

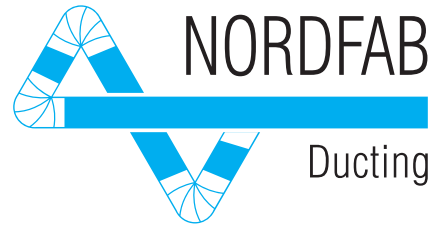

QF ends allow quick and easy mounting into Quick-Fit ducting systems.



Flanged ends will be as standard Nordfab Angle Flanges unless a custom hole pattern or a flange with no holes are specified.

Ø in.	Height in.	Width in.	Weight lb.
4	7	18	6
5	9	20	7
6	10	20	8
7	12	22	11
8	13	22	13
9	15	24	15
10	16	24	16
12	18	26	21
14	22	28	26


Ø in.	Height in.	Width in.	Weight lb.
4	7	18	8
5	9	20	9
6	10	20	10
7	12	22	13.5
8	13	22	15.5
9	15	24	17.5
10	16	24	18.5
12	18	26	24
14	22	28	29

Duct distance recommended:

At least ten diameters from cyclone / collector

Velocity:

1500 - 5000 fpm
(7.62m/sec - 25.4m/sec)

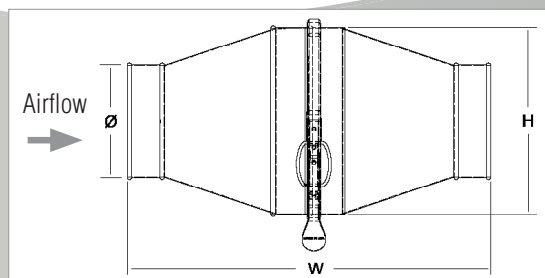

The Nordfab In-line Spark Trap is a simple, low-cost tool that can reduce incidents of fire events, reducing costs and disruption and improving safety. System redundancy and complementary measures should be applied.

Contact Nordfab to find your local ducting expert:
800-532-0830 | 336-821-0801

www.nordfab.com