
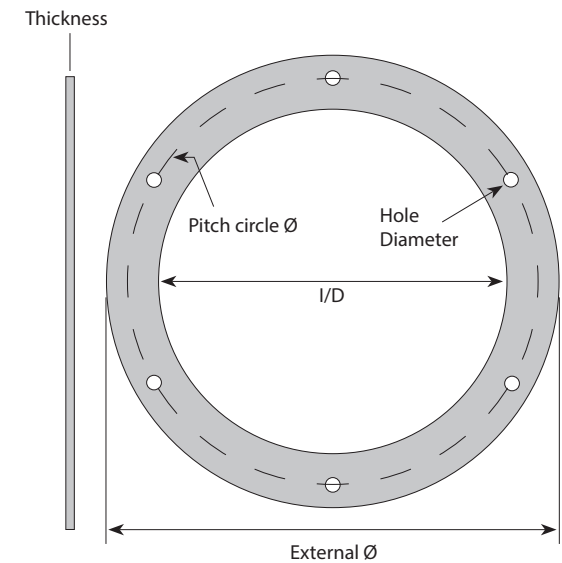


Duct Ø mm	I/D mm	Pitch circle Ø mm	External Ø mm	No. of holes	Hole Dia mm	Thickness mm	Weight kg
100	103	127	143	4	10	5.0	0.3
125	128	157	178	4			0.5
140	143	172	193	6			0.5
150	153	182	203	6			0.5
160	163	192	213	6			0.6
180	179	212	229	6			0.6
200	203	232	253	6			0.7
250	253	289	313	6			1.1
300	303	337	363	6			1.2
315	317	349	377	8			1.3
350	353	387	413	8			1.4
400	404	438	464	12			1.6
450	454	488	514	12			1.8
500	504	538	564	12			2.0
560	565	600	625	12			2.2
630	635	670	695	16			2.2
710	715	750	775	16			2.5
800	804	848	884	16			4.2
900	904	948	984	16			4.7
1000	1005	1049	1085	16			5.2

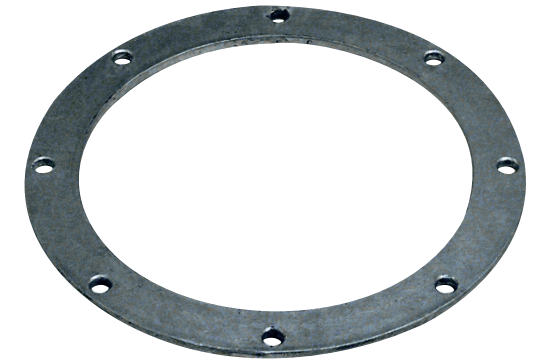

Temperature Rating of Product Components	
° C	Flange
200°	Mild Steel treated with hot-dip galvanisation
-51°	

Additional Notes		
Flanges are rolled from mild steel flat bar and treated after forming		
Compliance / Rating of Product Components		
Product	Material	Compliance / Rating
Flange	Mild steel	DX51D with Z275 Coating