

Jet Cap

Ordering Information

- When ordering, specify material, gauge (if non-standard), dimension and end style.
- Prevents rain from entering ducting.
- Inner funnel piece allows rain to drain out of ductwork even when system is not running.
- Has three angle brackets for guide wire attachment.
- Installs in seconds with standard QF Clamp.





Ø in.	Width in.	Height in.	Std Weight Lbs
6	10.12	14.40	14.00
8	13.25	18.40	33.00
10	16.50	22.40	51.00
12	20.00	27.00	59.00
13	21.50	30.00	63.00
14	23.12	32.80	70.00
15	24.50	34.00	79.00
16	26.50	36.40	84.00
17	27.70	38.00	90.00
18	29.50	40.00	98.00
20	32.50	44.40	111.00
22	35.40	47.50	118.00
24	38.60	51.50	138.00
26	42.20	55.00	166.00
28	45.20	59.00	185.00
30	48.20	63.00	202.00
32	51.20	67.00	214.00
34	54.60	71.00	226.00
36	58.20	74.70	240.00
38	61.20	79.00	252.00
40	64.20	83.00	271.00

QF Material Options

Galv				SS			
Gauges	Size (in)		Gauges	Size (in)			
	Min. Ø	Max. Ø		Min. Ø	Max. Ø		
Standard	22	6	12	Standard	22	6	12
	20	13	18		20	13	18
	20	20	24		20	20	24
Optional	18	6	18	Optional	18	6	18
	16	8	24		16	8	24
	14	8	24				

Flanged Material Options

Galv (Std)				SS			
Gauges	Size (inches)		Gauges	Size (inches)			
	Min. Ø	Max. Ø		Min. Ø	Max. Ø		
Standard	22	6	12	Standard	22	3	12
	20	13	18		20	13	28
	18	20	40		18	30	40
Optional	18	6	18	Optional	18	4	28
	16	8	40		16	8	40
	14	8	50				
	12	10	72				

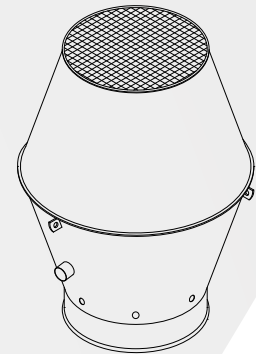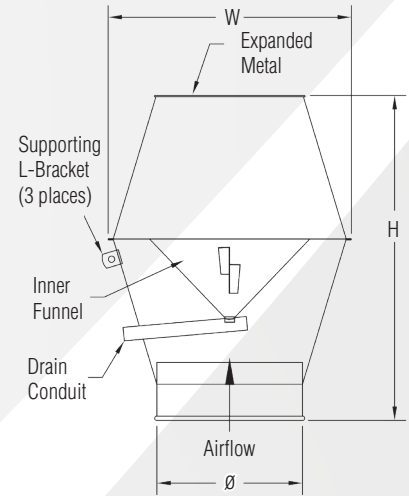

Construction

Top screen: expanded metal, 3/4" square pattern Koga painted black metal.

Collars: Collars have a laser welded longitudinal seam.

Drain conduit:

3/4" dia. used for 6" - 14" diameters

1-1/2" dia. used for 15" - 24" diameters

2" dia. used for 26" and larger diameters

Optional End Styles: Standard QF end

can be changed to Raw ID (RI), Raw OD

(RO), No Fitting (NF), Hose Adapter (RF),

Flat Flange (FFL), Angle Flange (AFL), or

Van Stone (VS).